

CAK-D5-A








Cold applied kit on stand for PSB/MSB/HSB cable.

Technical Data


Ambient temperature range	-67 to 131 °F / -55 to 55° C
Maximum pipe temperature	356 °F / 180 °C
Max. operating temperature end seal	PSB: 185 °F / 85 °C HSB: 374 °F / 190 °C
Min. installation temperature	-40 °F / -40 °C
Minimum bending radius of trace heaters	1" (25 mm) Do not bend on the narrow axis.
Ingress protection	NEMA Type 4X / IP66 (if properly installed in a suitable BARTEC junction box)

Kit Contents

The following table lists the kit contents for the CAK-D5-A On pipe cable gland kit and end seal:

1 x Silicone pants	
1 x End seal	
1 x Trace heater grommet	
1 x Blind plug	
1 x Green/yellow tube for grounding braid	
1 x Silicone adhesive	
3 x Ferrule	

BARTEC

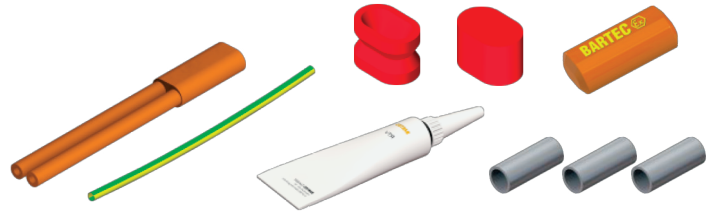

Certifications / Approvals



CAK-D5-A On pipe cable gland kit and end seal for BARTEC PSB / HSB trace heaters

CAK-D5-A On pipe cable gland kit and end seal

