

EL-CLIC

Quick Connector - OSR Series




Description


A simple, quick and reliable electrical connection system. For **OSR-NA** and **OSR-WA** Self-Regulating Heating Cables

Features


- All-in-one: quick connection of 1, 2 or 3 cables.
- More manageable: no additional parts required.
- Save time and money: no more wire stripping.
- Easy to install: no special tools required.
- Integrated brackets for mounting on wall or pipe.
- Sturdy, waterproof and UV-resistant box.
- Securely closed with a screw.

Specifications


Nominal Voltage:	300V
Nominal Current:	15A
Threaded flange:	Operating temperature: -20°C to 100°C (-4°F to +212°F)
Ambient Temperature:	-13 °F to +212 °F -25 °C to +100 °C
Enclosure material:	UV-resistant Polyamide
IP-rating:	NEMA 4 equivalent (IP 65)
Approvals:	 FM 17NUS0022 FM 17NCA0007
Dimensions (LxDxP):	7.5" x 2.75" x 2" / 190 x 70 x 50 mm
Weight, approx.:	1lb
Tools required:	Screwdriver, knife, pliers
Power cord/cold lead:	8'/2.5 m (EL-CLIC-P), AWG 14
Cable tie:	2 pcs 14"/360 mm, UV-resistant

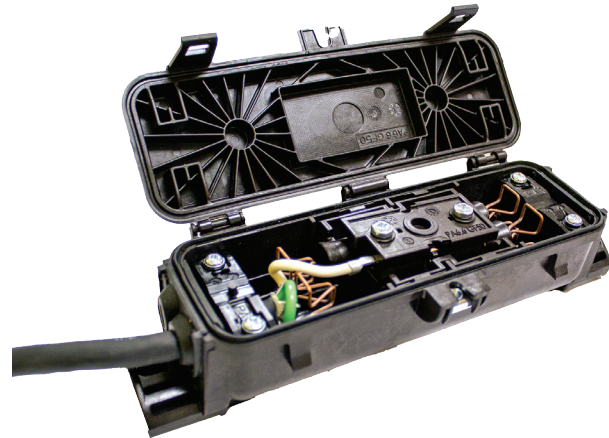

EL-CLIC-P

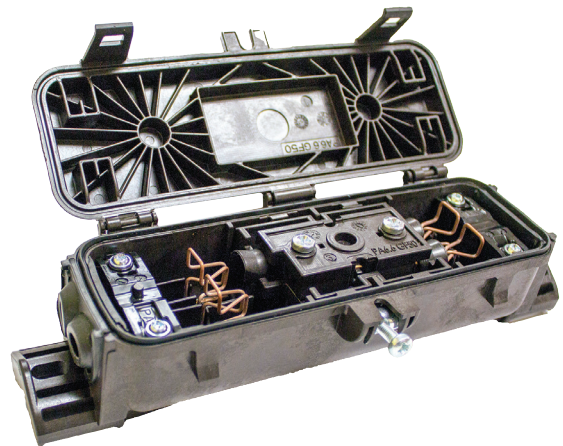

EL-CLIC-S

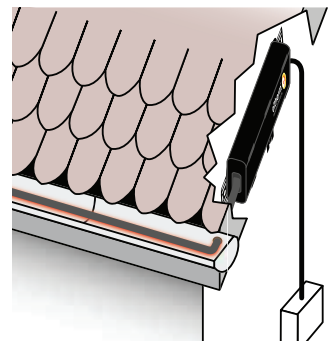

Product #	Description
ELCLIC-P	Quick connector with 8' supply lead. For connecting up to three self-regulating heating cables to a single power supply.
ELCLIC-S	Quick connector for direct connection or cold lead connection of up to three self-regulating heating cables.