

ELL-200-A

Cold applied kit on pipe stand PSB/MSB/ HSB cable for ordinary environment

BARTEC



Technical Data


Ambient temperature range	-40°F to 131°F / -40°C to 55°C
Min. installation temperature	-67°F / -55°C
Power supply	max. 277 Vac
Min. installation temperature	-67 °F / -55 °C
Protection classification	Class I, Div 2 Group A, B, C, D Class II, Div 2 Group E, F, G Class III
Ingress protection	NEMA Type 4X / IP65
Terminals	Spring clamp Ex e; 3x2 PE

Certifications / Approvals








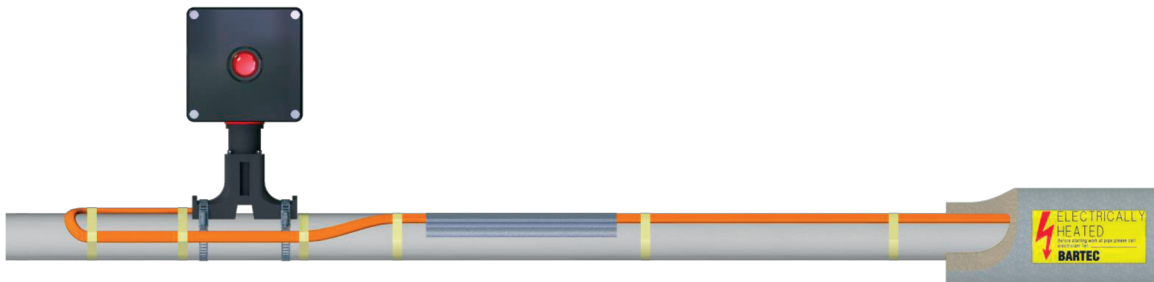





ELL-200-A End of line lamp kit for BARTEC PSB, MSB or HSB trace heaters

ELL-200-A End of line lamp kit



Kit Contents

The following table lists the kit contents of the ELL-200-A End of line lamp kit:

						
1 x Silicone pants	1 x End seal	1 x Green/yellow tube for grounding braid	3 x Ferrule	1 x Silicone adhesive	1 x Trace heater grommet	1 x Blind plug
						
1 x Cover for junction box incl. 4 fixing screws	1 x Junction box with lamp module and grounding terminal	1 x Top unit of the mounting stand incl. sealing ring and lock nut	1 x Base unit of the mounting stand			