

TRACON MODEL GPT 230

Dual-point general purpose heat-trace control

Description

The GPT 230 Dual Channel Heat-Trace Control

It is a dual-point microprocessor-based heat-trace control thermostat. It is ideal for applications which require two independent heater-control Channels with Ground-Fault Equipment Protection (GFEP). Ideal uses include freeze protection, hot water temperature maintenance, grease line trace, tank heating, and other temperature monitoring and control applications.

The GPT 230 Heat-Trace Control operates from the heater's power source. A universal power supply allows the GPT 230 to operate from 100 V ac to 277 V ac. It can independently or jointly control two resistive loads up to 30 amps each.

Adjustable Temperature Setpoint and Alarms

The temperature setpoints are adjustable from -99.9 °F to 999 °F (-73.3 °C to 537.7 °C) to a tenth degree resolution.

Sensor Inputs

The GPT 230 comes with two 100K ohm Thermistor temperature sensors with 20 ft. jacketed cables. The included sensors have an operating range of 40 °F to 230 °F (-40 °C to 110 °C). The GPT 230 can also use 3-wire RTD sensors for systems requiring high-temperature sensing. Two temperature sensor inputs are provided, and the channels can operate independently or from one sensor.

Precision Monitoring and Control

The GPT 230 monitors temperature, load current, and ground leakage current. Alarms include high temperature, low temperature, high load current, low load current, ground fault, sensor fault, internal fault,



and power fail. These alarms are easy to adjust and observe from the front panel. The GPT 230 can be set to energize or de-energize the heaters during a sensor fault.

Ground-Fault Equipment Protection

The GPT 230 Heat-Trace Control includes integral GFEP for each channel. This eliminates the extra expenses associated with having to provide separate GFEP components in the circuit panel. The GPT 230 normally disconnects power immediately to the affected zone when ground fault current exceeds the set value. But if it is set to Fire Protect mode, for critical fire protection systems, then it will generate the alarm but power will be maintained to prevent freezing.

Automatic GFEP Circuit Self-Test

To ensure continued safe operation, the GPT 230 performs a self-test of the GFEP circuits when power is first applied, along with a load ground fault test, and this repeats periodically thereafter at an adjustable interval.

For complete information describing its application, installation, and features, please contact Customer Service or check on the web at networketi.com.

Specifications

General

Certifications: UL 60730-1, UL 1053, CSA E60730-1:13

Environmental

Area of use: Nonhazardous locations
 Operating Temperature Range: -40 °F to 122 °F (-40 °C to 50 °C)

Enclosure

Dimensions: 9.0" (W) 12 4/5" x (H) x 5 9/10" (D)
 229 mm (W) x 325 mm (H) x 150 mm (D)

Ingress Protection: NEMA 4X, IP66

Cover Attachment: Polycarbonate cover

Cable Entries:

Two liquid-tight cable glands installed for sensor and alarm leads, cable diameter 0.08" to 0.24" (2 mm to 6 mm)
 Two 1.046" holes to accommodate 3/4" conduit fittings for power wiring connections

Material: Polycarbonate

Weight: 5.8 lb. (2.63 kg)

Mounting: Wall mount with flanges

Wiring Terminal Ratings

Power:	Barrier Strip Terminals for Line, Neutral, and Ground; use 10 AWG wires rated for at least 194 °F (90 °C)
Sensors:	Terminal Block, rising cage clamp, 12–28 AWG leads
Alarm relay:	Terminal Block, rising cage clamp, 12–28 AWG leads

Parameter Settings

Temperature Setpoint Heat ON:	Adjustable –99.9 °F to 999 °F (–73.3 °C to 537.7 °C) Default 38 °F (3.33 °C)
Temperature Setpoint Heat OFF:	Adjustable –99.9 °F to 999 °F (–73.3 °C to 537.7 °C) Default 40 °F (4.44 °C)
Low–Temperature Alarm Threshold:	–99.9 °F to 999 °F (–73.3 °C to 537.7 °C) Default 35 °F (–1.7 °C) Disabled
Low–Temperature Alarm Delay:	0 s to 3000 s Default 300 s
High–Temperature Alarm Threshold:	–99.9 °F to 999 °F (–73.3 °C to 537.7 °C) Default 140 °F (60 °C) Disabled
High–Temperature Alarm Delay:	0 s to 3000 s Default 300 s
Low–Current Alarm Threshold:	0.0 A to 10.0 A Default 0.1 A Enabled
Low–Current Alarm Delay:	0 s to 300 s Default 5 s Enabled
High–Current Alarm Threshold:	0.0 A to 55.0 A Default 30.0 A Disabled
High–Current Alarm Delay:	0 s to 600 s Default 300 s
Ground Fault Limit Current:	1.0 mA to 300.0 mA Default 30 mA
Self–Test Interval:	1 h to 250 h Default 24 h Enabled
Temperature Unit:	°F or °C

User Interfaces

Pushbuttons:	UP, DOWN, ENTER, TEST / RESET BACK
DIP switches:	Panel lockout

Remote Interface

Alarm Relay:	Isolated SPDT 1 AMP Class 2 contact per channel
--------------	--

Indicators

Status Indicator:	Power (Green) Heater (Yellow) Low Temperature (Blue) Summary alarm (Red)
Display:	2.7" OLED graphic 128x64

Summary Alarm Relay Reporting:	Low temperature High temperature Low load current High load current High ground fault current Stuck relay Sensor fault Internal fault
--------------------------------	--

Control Ratings

Temperature Accuracy:	+/- 2 °F (1 °C)
Temperature Sensors	(Included) Two Thermistors: 100k ohms at 25 °C, range –40 °F to 230 °F (–40 °C to 110 °C), 20ft Lead (25076) RTD Sensor (SOLD SEPARATELY): Platinum, Alpha = 0.00385, ITS–90, 100 ohms at 0 °C Input supports 3-wire connection Sensor operates at 1 mA


GFEP (Ground–Fault Equipment Protection)

Operation:	Continuously tests ground fault current whenever the load is on; also manually and periodically tests equipment ground fault current with each self–test.
Range	Adjustable 1 mA to 300 mA, Default 30 mA
Automatic Self–Test:	Verifies GFEP functionality every 24 hr. and whenever the load is energized

Power

Supply Voltage:	100 – 277 V ac 50/60 Hz
Controller Power Consumption:	7 W maximum, 2.2 W idle
Load Rating, Each Channel:	30 A, 100 – 277 V ac resistive

Dimensional Drawings

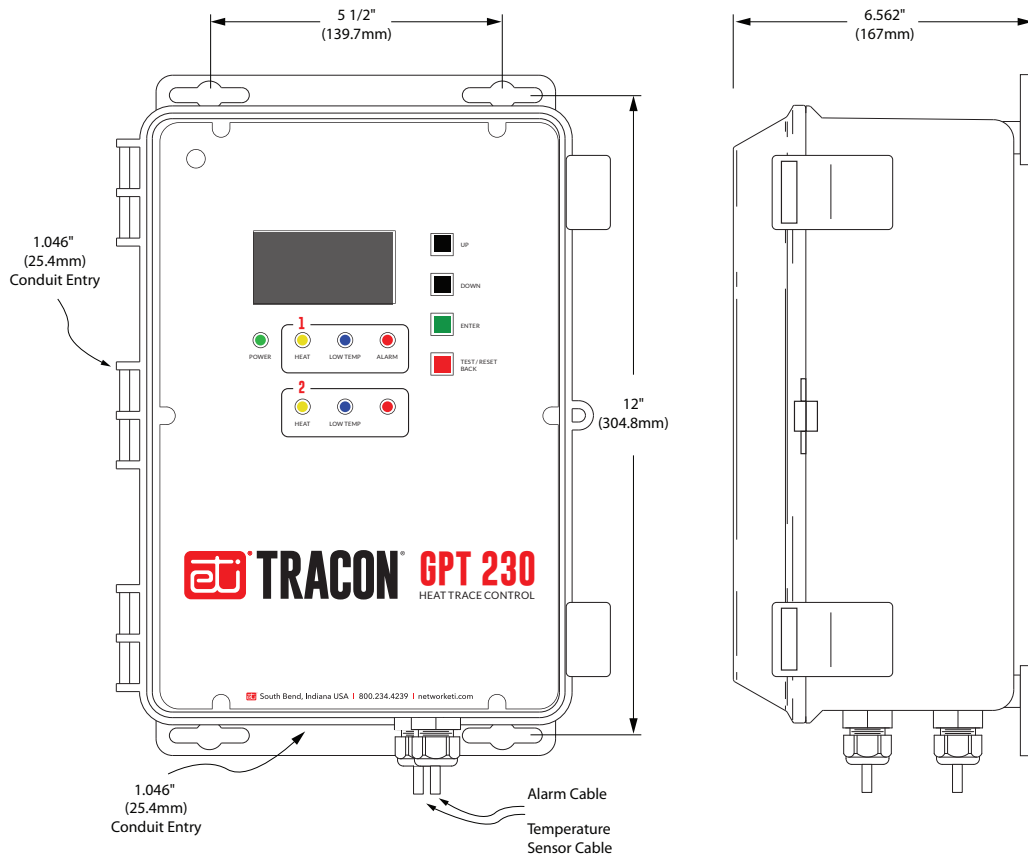

Ordering Information

Part Number	Description
25171	Tracon MODEL GPT 230 Dual-Point General Purpose Heat-Trace Control
25076	Temperature Sensor

Limited Warranty

ETI's two year limited warranty covering defects in workmanship and materials applies. Contact Customer Service for complete warranty information.

Disclaimer

ETI makes no representations or warranties, either expressed or implied, with respect to the contents of this publication or the products that it describes, and specifically disclaims any implied warranties of merchantability or fitness for any particular purpose. ETI reserves the right to revise this publication, and to make changes and improvements to the products described in this publication, without the obligation of ETI to notify any person or organization of such revisions, changes or improvements.

The ETI logo, We Manage Heat, CIT, GPT, and SIT are registered trademarks of ETI. EUR and RCU are trademarks of ETI. Copyright © 2019 ETI. All rights reserved. Printed in USA.

Contacting Customer Service

For assistance, contact Customer Service. Office hours are from 8:00 AM until 5:00 PM ET.

Email: info@networketi.com

Web: networketi.com

Mail: ETI
1850 North Sheridan Street
South Bend, IN 46628